

IDEAL LOGIC+ 30 BOILER INTERNAL

MANUFACTURED BY:



The Logic+ 30 Condensing System Boiler provides excellent energy saving, and performs quietly in your home.

- Made in the UK
- 1:5 Modulation rate
- Built in Frost Protection
- Large backlit LCD display
- Aluminium Silicon Heat Exchanger
- Light weight and compact design
- Quiet operation
- User friendly control panel

BALLARAT HYDRONIC HEATING

PHONE 0418 128 584

sales@ballarathydronicheating.com.au

10 YEAR*
WARRANTY



MODELS

Logic+ 30kW System

MEASUREMENTS

700 (H) x 395 (W) x 278 (D) mm

MAGNA CLEAN FILTER



WATER TREATMENT




BALLARAT HYDRONIC HEATING

Servicing the Ballarat and surrounds, we have over 20 years experience designing, installing and servicing hydronic heating systems.

We have the knowledge, dedication and expertise to carry out any job with professionalism and attention to detail.

PHONE 0418 128 584


sales@ballarathydronicheating.com.au




Part of the Nissl Eichert Group

General Data		30 System		
Gas Supply - NG/LPG		1.13kPa / 2.75kPa		
Gas Supply Connection		1/2"		
Flow Connection		3/4"		
Return Connection		3/4"		
Flue Terminal Diameter		mm	100	
CO2 Content (± 0.7) NG/LPG	Max. CH	8.9%/10.7%		
	Min. CH	8.7%/10.4%		
Maximum Working Pressure (Sealed Systems)		kPa	250	
Electrical Supply		230 V ~ 50 Hz		
Power Consumption		W	100	
Min. thermostat cable size		1mm twin active		
Water Content		Litre	1.2	
Height		mm	700	
Width		mm	395	
Depth		mm	278	
Packaged Weight		kg	31.5	
Installation Weight		kg	26.1	
Performance Data		Min	Max	
Boiler output - Mean 70°C		kW	6.1	30.3
Boiler output - Mean 40°C		kW	6.4	31.0
Gas Consumption		MJ/h	23.01	119.41
Boiler Efficiency		%	91.1	


CLEARANCES

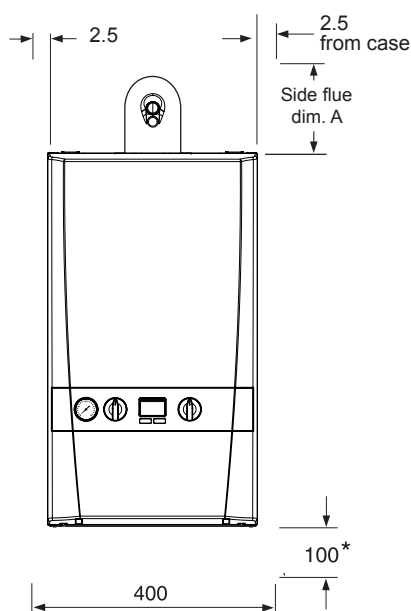

BOILER DIMENSIONS

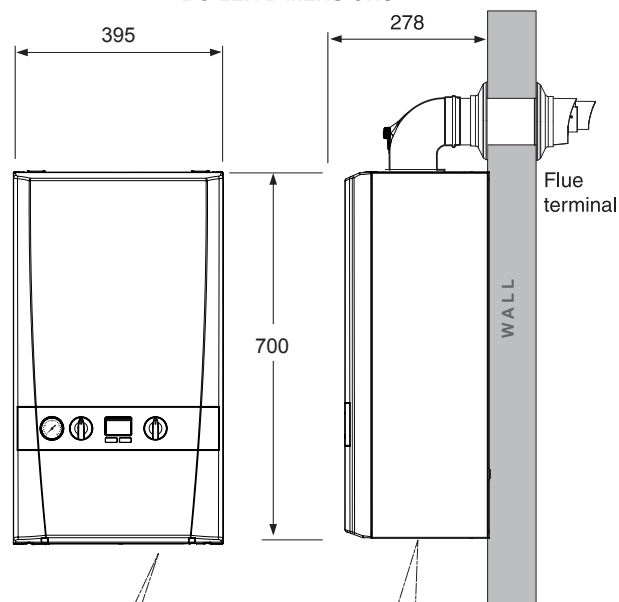

Water Connections and Gas Connection

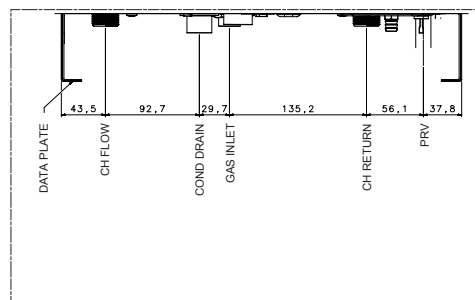

Underside View - Pipe Dimensions to Wall

